
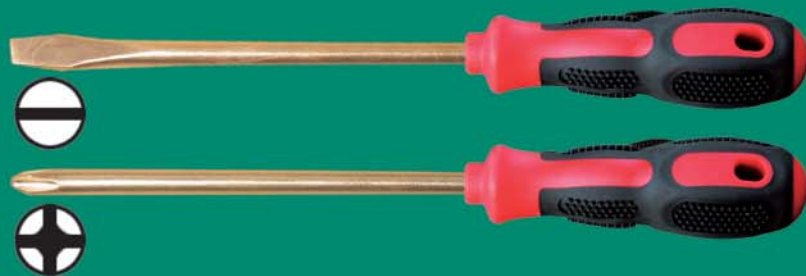



CNFB®

F

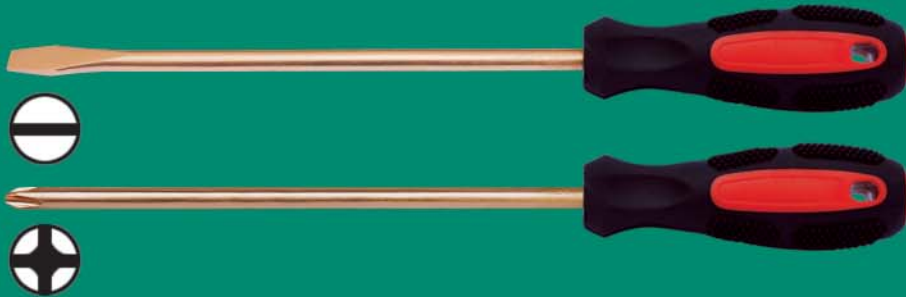

PERFECT MATERIAL
KEEP 100% QUALIFIED

No.259 Slotted Offset Screwdriver

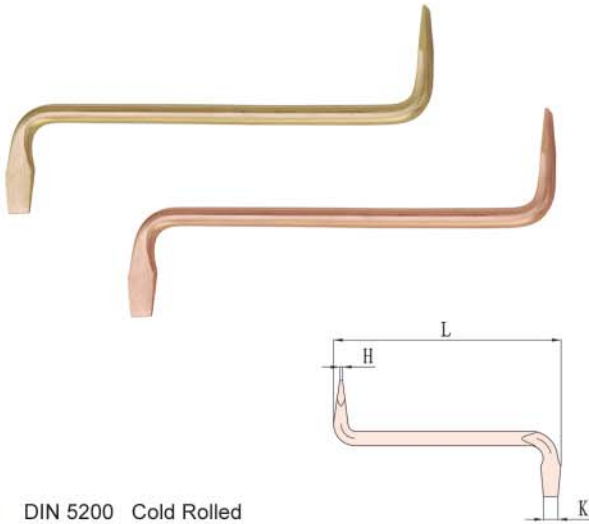

- DIN 5200 Cold Rolled
- A screwdriver with the head set perpendicular to the shaft for access to screws in otherwise awkward places.

Number	L mm	H mm	K mm	Be-Cu g	Al-Cu g
259-1002	72	1	6	25	23
259-1004	125	1.5	8	55	50
259-1006	196	1.5	10	135	124




No.260 Slotted Screwdriver



- ISO 2380 Cold Rolled
- Fasten and unload slotted blot.

Number	L ₁ inch	L ₁ mm	L mm	H mm	B mm	Be-Cu g	Al-Cu g
260-1002	2	50	134	0.4	3	35	33
260-1004	2	50	134	0.5	4.5	43	40
260-1006	3	75	159	0.4	3	35	32
260-1008	3	75	159	0.5	4	45	42
260-1010	3	75	180	0.6	5	70	65
260-1012	4	100	184	0.5	4	45	42
260-1014	4	100	205	0.6	5	75	70
260-1016	4	100	215	0.8	6	85	80
260-1018	5	125	240	0.8	6	100	95
260-1020	6	150	265	0.8	6	110	105
260-1022	6	150	265	1	7	125	120
260-1024	6	150	277	1.2	8	140	135
260-1026	8	200	327	1.2	8	165	155
260-1028	10	250	377	1.4	9	185	175
260-1030	10	250	377	2	11	260	245
260-1032	12	300	427	1.8	10	245	230
260-1034	12	300	427	2	11	290	275
260-1036	14	350	477	2	11	320	300
260-1038	16	400	550	2.4	12	450	430

No.259A Phillips Offset Screwdriver

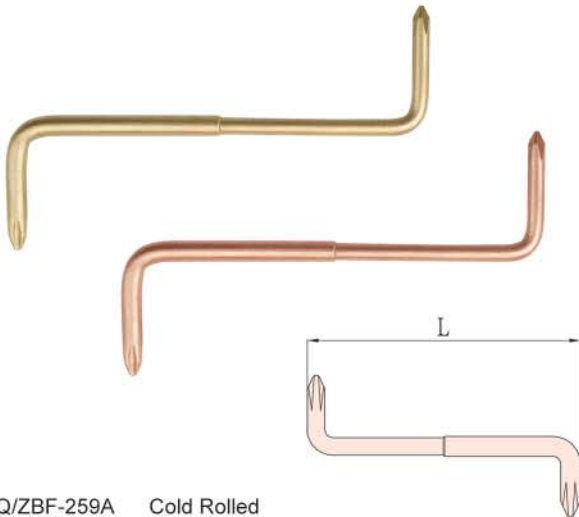


- Q/ZBF-259A Cold Rolled
- A screwdriver with the head set perpendicular to the shaft for access to screws in otherwise awkward places.

Number	L mm	size	Be-Cu g	Al-Cu g
259A-1002	120	1#*2#	50	45

No.261 Phillips Screwdriver




- ISO 8764 Cold Rolled
- Fasten and unload phillips bolts(screw nail).




Number	L ₁ inch	size	L ₁ mm	L mm	Φ mm	Be-Cu g	Al-Cu g
261-1002	2	0	50	134	3	35	32
261-1004	3	1	75	159	4	70	63
261-1006	4	1	100	205	5	75	70
261-1008	5	2	125	240	6	100	95
261-1010	6	2	150	265	6	110	105
261-1012	8	3	200	327	8	165	155
261-1014	10	3	250	377	8	185	170
261-1016	12	4	300	427	9	245	230
261-1018	14	4	350	477	9	270	255
261-1020	16	4	400	550	9	295	280
261-1022	18	4	450	600	9	320	300

No.263 Slotted Screwdriver

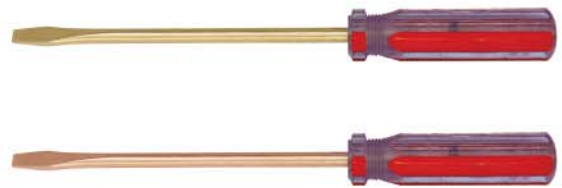

- Q/ZBF-263 Cold Rolled
- Fasten and unload slotted bolt, the handle can be striken.




Number	L ₁ inch	L ₁ mm	L mm	H mm	B mm	Be-Cu g	Al-Cu g
263-1002	2	50	108	0.4	3	35	32
263-1004	3	75	133	0.5	3	48	44
263-1006	3	75	153	0.5	4	50	45
263-1008	3	75	153	0.6	5	51	46
263-1010	4	100	178	0.5	4	60	55
263-1012	4	100	178	0.6	5	71	65
263-1014	4	100	193	0.8	6	77	70
263-1016	6	150	243	1	7	115	105
263-1018	8	200	305	1.2	8	197	180
263-1020	10	250	355	1.4	9	221	202
263-1022	12	300	420	1.8	10	304	278
263-1024	14	350	470	2	11	365	335

No.262 Screwdriver



- Q/ZBF-262 Die forged
- Fasten and unload slotted bolts(screw nail).




Number	L mm	L ₁ mm	B mm	Be-Cu g	Al-Cu g
262-1002	200	100	8	135	125
262-1004	250	110	8	220	204
262-1006	300	160	10	305	275
262-1008	500	350	11	505	461

No.263A Electrician Screwdriver



- Q/ZBF-263A Cold Rolled
- Fasten and unload electrician slotted bolt




Number	L ₁ inch	L ₁ mm	L mm	H mm	B mm	Be-Cu g	Al-Cu g
263A-1002	2	50	134	0.4	3	37	35
263A-1004	4	100	184	0.5	4	47	45
263A-1006	4	100	215	0.8	6	95	90
263A-1008	6	150	277	1.2	8	145	135
263A-1010	8	200	327	1.8	10	230	210

No.263B Driver Hex Nut



- Q/ZBF-263B Die forged
- Fasten and unload Hex blot.Hex nut in the narrow place that hand can not touch.




Number	L ₁ mm	L mm	S mm	Be-Cu g	Al-Cu g
263B-1002	90	205	6	85	81
263B-1004	100	215	8	100	85
263B-1006	110	225	10	140	130
263B-1008	110	237	13	185	172
263B-1010	120	247	16	220	205
263B-1012	120	247	17	230	218

No.264A Torx Screwdriver



- ISO 8764 Cold Rolled
- Fasten and unload torx bolt.




Number	size	L ₁ mm	L mm	Be-Cu g	Al-Cu g
264A-1002	T10*75	75	180	70	63
264A-1004	T15*75	75	180	70	63
264A-1006	T20*100	100	215	100	95
264A-1008	T25*125	125	240	105	100
264A-1010	T30*150	150	265	110	100
264A-1012	T40*200	200	327	165	155
264A-1014	T45*250	250	377	185	175
264A-1016	T50*300	300	427	205	195
264A-1018	T55*350	350	477	245	225
264A-1020	T60*400	400	527	280	255

No.264 Pozidriv Screwdriver



- GB/T 5358 Cold Rolled
- Fasten and unload Pozidriv bolt.



Number	L ₁ inch	Size	L ₁ mm	L mm	Be-Cu g	Al-Cu g
264-1002	2	0	50	134	35	33
264-1004	3	1	75	159	45	42
264-1006	4	2	100	220	85	80
264-1008	6	3	150	277	145	135
264-1010	8	4	200	327	230	210



No.264B Screwdriver Bits



- Cold Rolled
- Hand operation on impact tools or electric tools.

Number	size
264B-⊖	4.5mm, 6.5mm, 8mm
264B-⊕	1#, 2#, 3#, 4#
264B-⊗	1#, 2#, 3#, 4#
264B-●	3mm, 4mm, 5mm, 6mm, 7mm, 10mm
264B-⊛	T10, T15, T20, T25, T27, T30, T40

No.264C Manual Impact screwdriver set




- Cold Rolled
- Strong and durable, plastic case for convenient storage.

Number	size	PCS	Be-Cu g	Al-Cu g
264C-⊖	8*70	2	825	750
264C-⊕	PH4*70	2		
264C-⊖	8*30	1		
264C-⊕	PH4*30	1		

No.265 Slotted Screwdriver



- ISO 2380 Cold Rolled
- Fasten and unload slotted bolt.




Number	L ₁ inch	L ₁ mm	L mm	H mm	B mm	Be-Cu g	Al-Cu g
265-1002	2	50	150	0.4	3	35	33
265-1004	2	50	150	0.5	4.5	43	40
265-1006	3	75	175	0.4	3	35	32
265-1008	3	75	175	0.5	4	45	42
265-1010	3	75	175	0.6	5	70	65
265-1012	4	100	200	0.5	4	45	42
265-1014	4	100	200	0.6	5	75	70
265-1016	4	100	200	0.8	6	85	80
265-1018	5	125	225	0.8	6	100	95
265-1020	6	150	250	0.8	6	110	105
265-1022	6	150	250	1	7	125	120
265-1024	6	150	250	1.2	8	140	135
265-1026	8	200	320	1.2	8	165	155
265-1028	10	250	370	1.4	9	185	175
265-1030	10	250	400	2	11	260	245
265-1032	12	300	450	1.8	10	245	230
265-1034	12	300	450	2	11	290	275
265-1036	14	350	500	2	11	320	300
265-1038	16	400	550	2.4	12	450	430

No.266 Phillips Screwdriver



- ISO 8764 Cold Rolled
- Fasten and unload phillips bolts(screw nail).



Number	L ₁ inch	size	L ₁ mm	L mm	Φ mm	Be-Cu g	Al-Cu g
266-1002	2	0	50	150	3	35	32
266-1004	3	1	75	175	4	70	63
266-1006	4	1	100	200	5	75	70
266-1008	5	2	125	225	6	100	95
266-1010	6	2	150	250	6	110	105
266-1012	8	3	200	320	8	165	155
266-1014	10	3	250	370	8	185	170
266-1016	12	4	300	450	9	245	230
266-1018	14	4	350	500	9	270	255
266-1020	16	4	400	550	9	295	280
266-1022	18	4	450	600	9	320	300